

PAGE:007 R=96%

ID:MANELLI DENISON

MAR-24-2005 01:51PM FRX:703 308 5397

Record Display Form

Page 1 of 1

Previous DocNext Doc  
First HitGo to Doc#

Generate Collection

L2: Entry 56 of 84

File: JPAB


Nov 24, 1987

DOCUMENT-IDENTIFIER: JP 62269551 A  
 TITLE: FACSIMILE PICTURE DATA SENDING EQUIPMENT

## Abstract Text (2):

CONSTITUTION: At the time of sending facsimile picture data, a CPU control part 1 conveys the header information such as a comment message inputted by a keyboard 9 from an operator to a fixing code information memory 10. A picture control part 2 reads the header information such as data and transmitting person names from a fixing code information memory 3, reads it from a fixing code information memory 10, assembles it with the header information such as the comment message, executes a code picture conversion between code picture converting tables 11 and executes the adding processing to the picture data to be sent. Thus, even the information such as the comment message, which cannot be supplemented by the picture data to be sent, can be added as the header information.

Application Date (1):  
 19860519

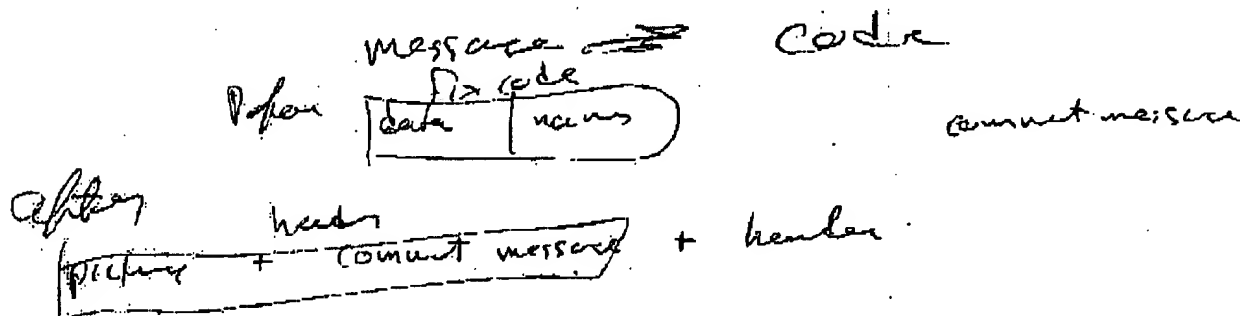Previous DocNext DocGo to Doc#


Weber T

BEST AVAILABLE COPY



特開昭62-269551 (4)

BEST AVAILABLE COPY

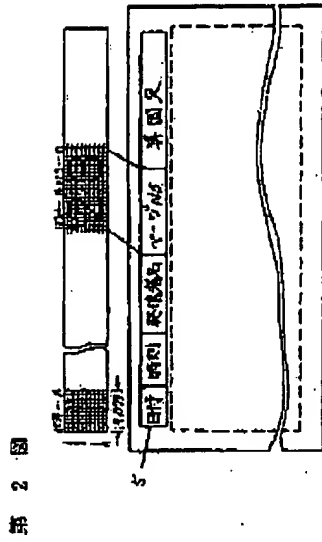

第 3 図

